

NORTH VINE STREET IMPROVEMENTS


Construction to improve the North Vine Street Corridor (also known as US Highway 183) between 32nd/33rd Streets and 41st Street began in June 2020. Once complete, the project will replace the traffic signals in the corridor with roundabouts. Roundabouts are proven to improve traffic flow and reduce the number and severity of traffic-related accidents. In addition, these investments will better accommodate future redevelopment in the area. **North Vine Street is anticipated to remain open to traffic throughout construction.**

PROJECT CONTACT:
 John Braun
 Project Manager
 City of Hays, Kansas
 (785) 621-1472
 johnbraun@haysusa.com

CONSTRUCTION PHASING

The project will be constructed over two construction seasons with several phases in each season. During the 2020 season, the west frontage road will be constructed along with the roundabout at 32nd and 33rd Streets. Also during the 2020 construction season, 37th Street will be extended west to Skyline and Skyline will be extended north to 41st Street. During the 2021 season, the three roundabouts at 37th Street, I-70 ramps, and 41st/Mopar will be constructed. While the west half of the roundabouts are under construction, traffic will be one lane in each direction (head to head) in the east lanes, and while the east half is being built, traffic will be head to head in the west lanes. While the center of the roundabouts are under construction, traffic will be in the outside lanes. Left turns will be restricted in the construction zones to reduce traffic backup; however, there will always be access to all businesses. Thank you in advance for your patience.


ANTICIPATED CONSTRUCTION TIMELINE: JUNE 2020 THROUGH NOVEMBER 2021

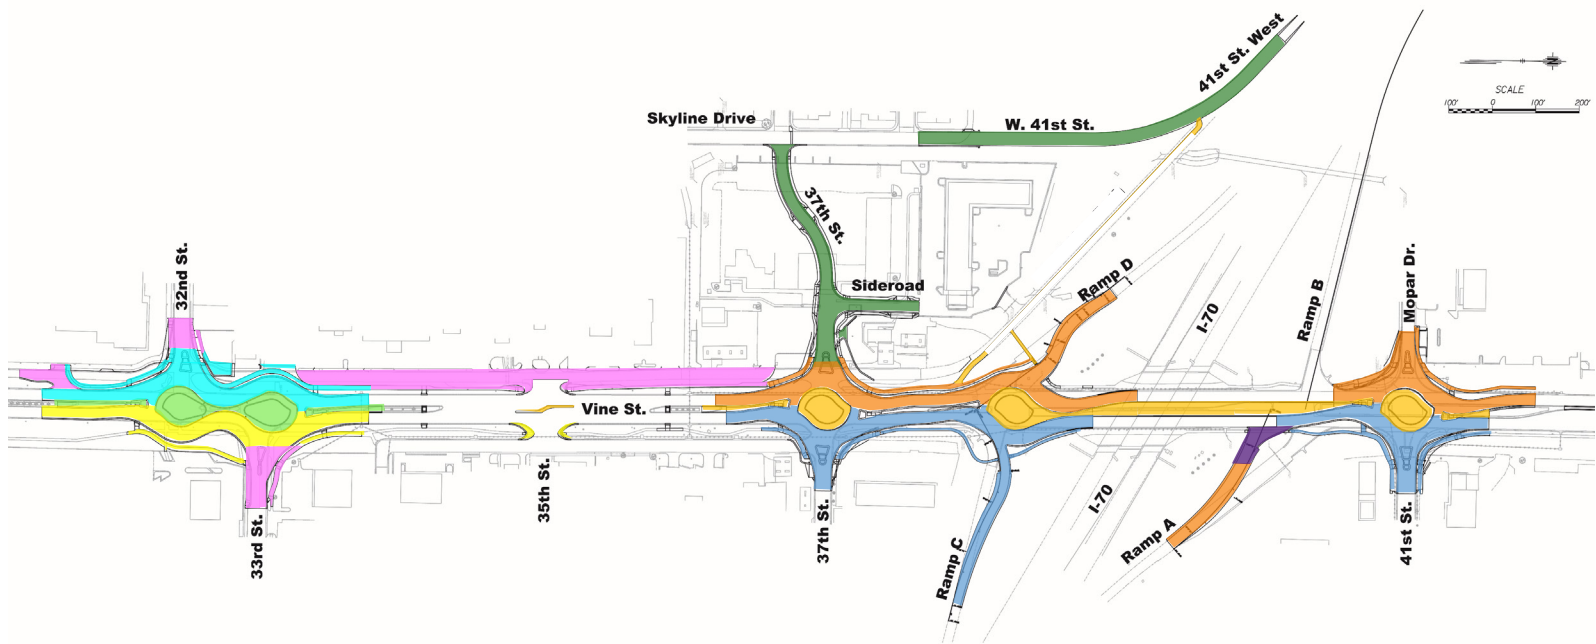

| | | | | | | | | |
|---|-----------------------------|-----------------------------|-----------------------|---|--|-----------------------------|-----------------------------|-----------------------------|
| SEASON 1 CONSTRUCTION: June 2020 - November 2020 | | | | OFF VINE <i>June 2020 thru Mar 2021</i> | SEASON 2 CONSTRUCTION: Mar 2021 - November 2021 | | | |
| PHASE 1 Jun - Jul | PHASE 2 Aug - Sep | PHASE 3 Sep - Oct | PHASE 4 Nov | | PHASE 1 Mar -Apr | PHASE 2 May - Jul | PHASE 3 Jul - Sep | PHASE 4 Oct - Nov |

NORTH VINE STREET CORRIDOR TRAFFIC FLOW

Season 1, Phase 1C, Step 1, 32nd and 33rd Street Intersections - June 2020

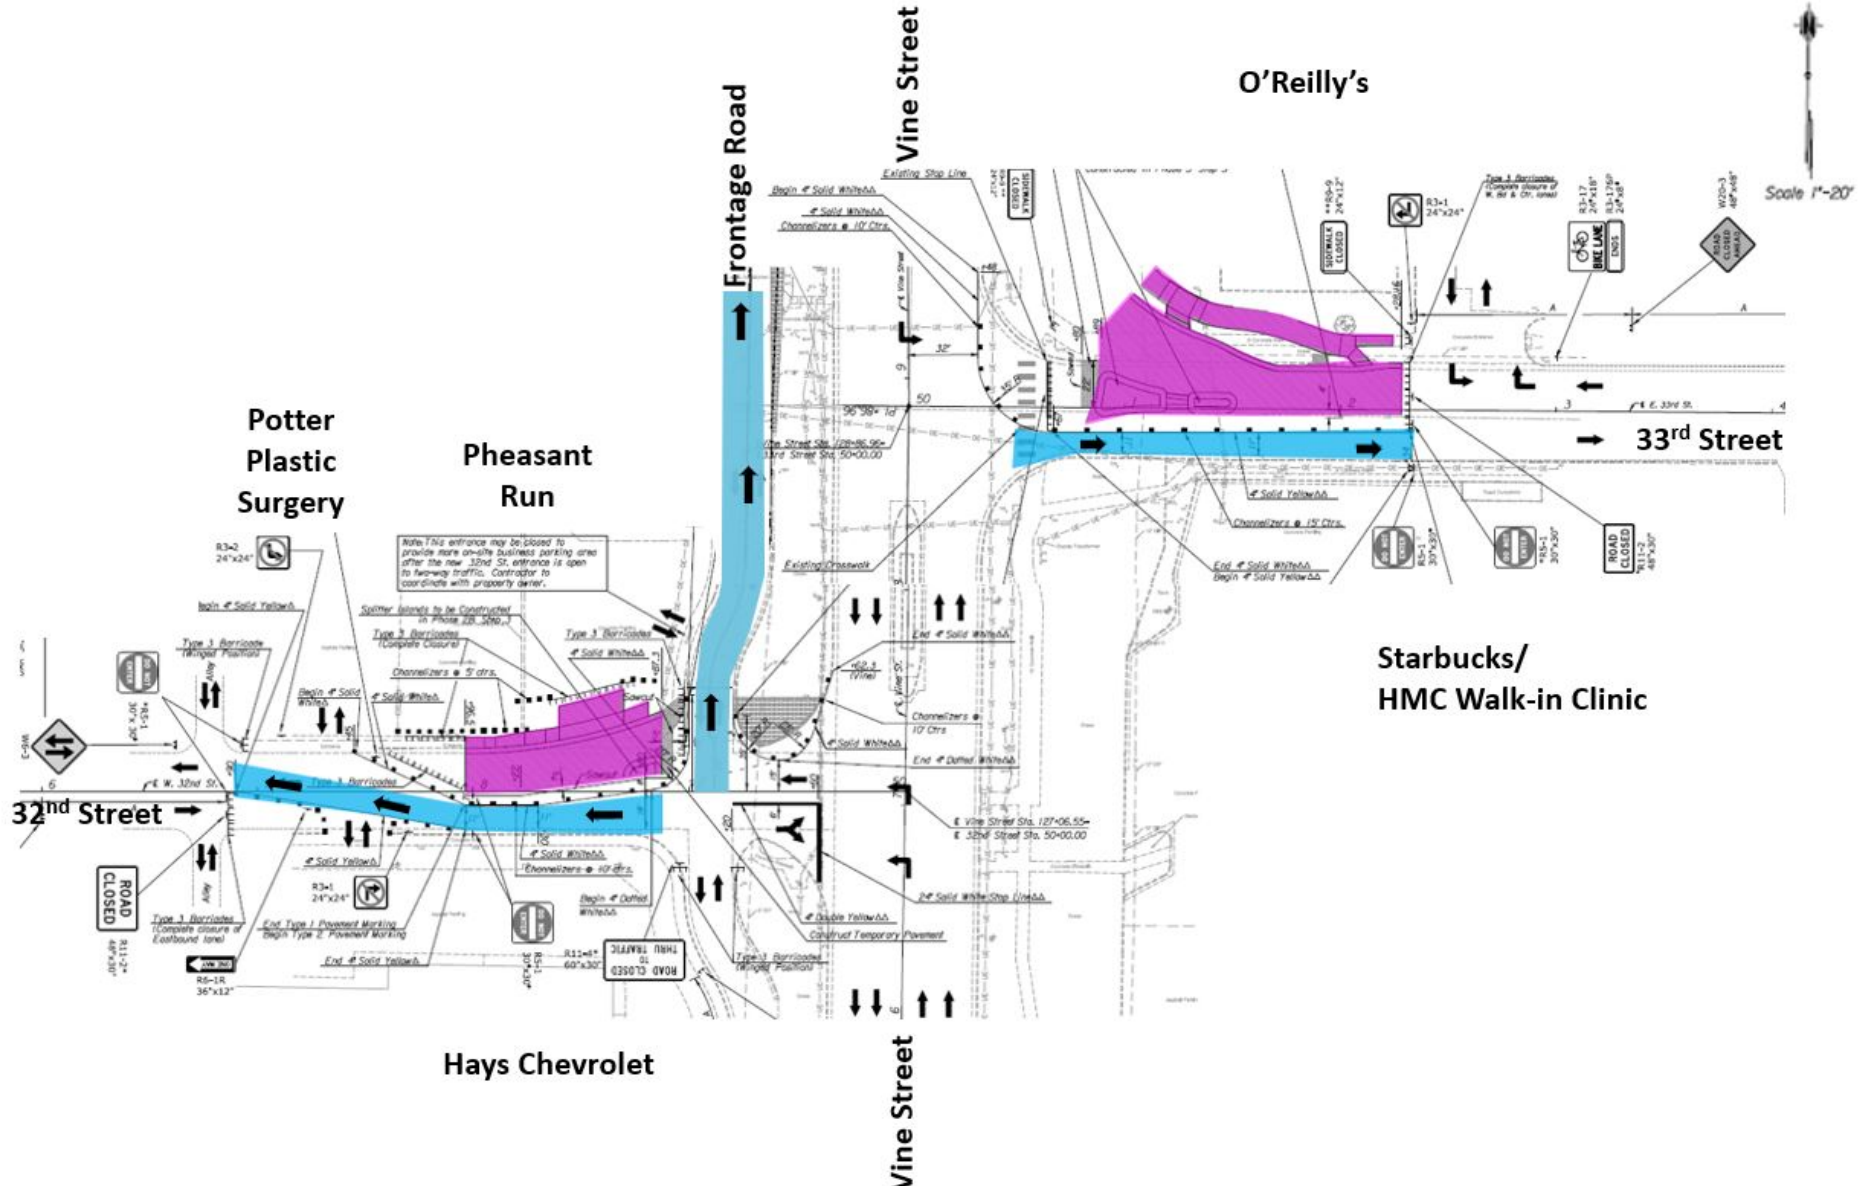

SEASON 1: June 2020 – November 2020

PHASE 1C Step 1
June 2020

| | | |
|--|-------------------------|--|
| | Closed for Construction | |
| | Traffic Flow | |